


Frame Synchronizer / Time Base Corrector

UFM-145DFS


A modular type TBC/FS with the supreme analog composite to digital component converter, the UFM-145DFS has wide internal genlock capability, so that almost low grade composite video signal can be genlocked.

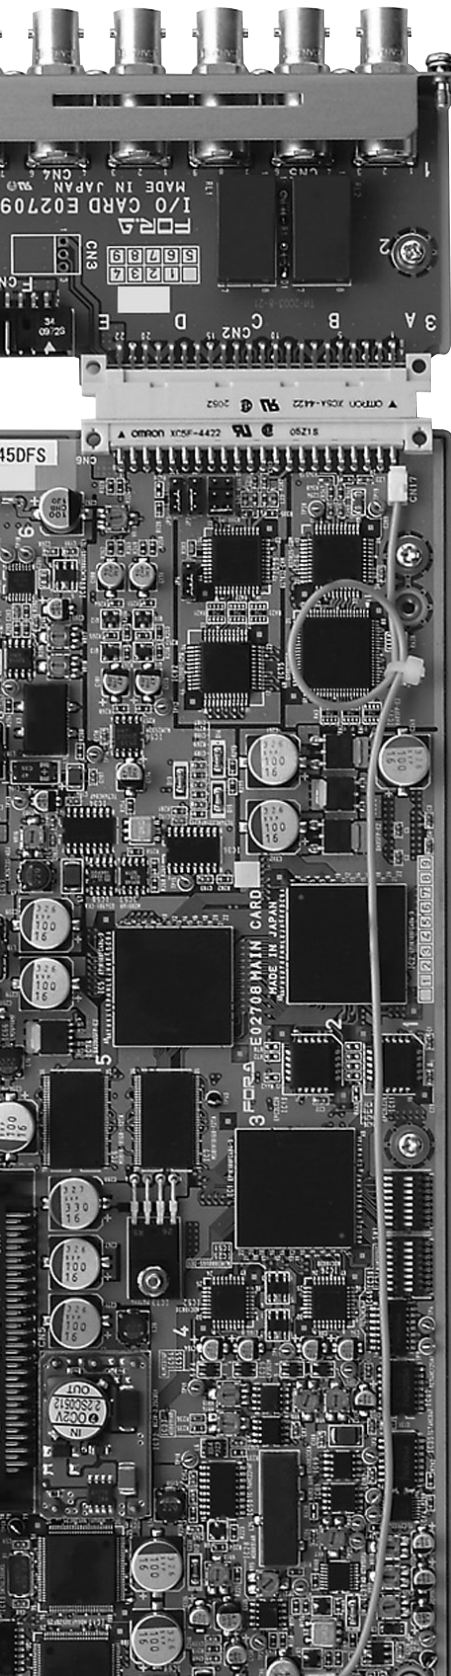

Features

- Supreme composite to digital component converter.
- 4:2:2 component internal signal processing.
- 10-bit signal processing.
- NTSC/PAL automatic detection.
- Full frame memory to prevent picture field inversion during processing.
- Line FS mode available (Minimum delay).
- SD-SDI ANC data signal pass through.
- SD-SDI signal EDH enable/disable.
- Process control functions (video level, chroma level, setup level and chroma phase).
- Monitoring analog composite available.
- Dedicated optional audio interface, UFM-100AED, enables embedded/de-embedded audio.
- Standalone type FA-145 lineup.

Block Diagram

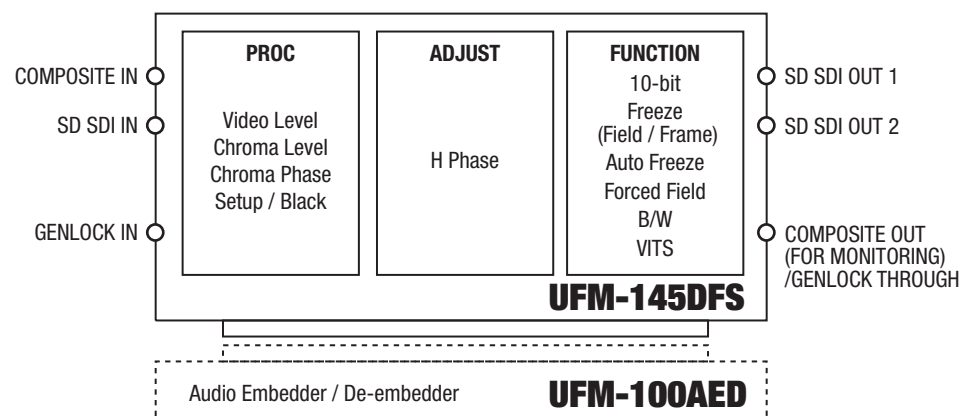

FS
&
TBC

Analog
Composite
1 in / 1 out

SD SDI
1 in / 2 out

10 bit
Process


MUX
DeMUX
(Option)

Specifications

Standard	525/60 (NTSC) or 625/50 (PAL) (Auto detect)
Signal Processing	4:2:2 component
Correction	2 field (field inversion prevented)
Sampling Frequency	Y: 13.5MHz, C: 6.75MHz
Quantization	10-bit
Video Input	Selectable as below
Analog composite	1.0Vp-p, 75Ω, 1ea., BNC
Digital component	270Mbps, 75Ω, 1ea., BNC
Reference Input	BB: 0.429Vp-p (NTSC) / 0.45Vp-p (PAL), 75Ω or loopthrough, 1ea., BNC
Video Output	
Digital component	270Mbps, 75Ω, 2ea., BNC
Analog composite	1.0Vp-p, 75Ω, 1ea., BNC (For monitoring)
Frequency Response	100kHz - 4.2MHz: -0.5dB - +0.5dB, 4.2MHz - 5.0MHz: -1.0dB - 0dB, roll off above 5.0MHz (NTSC) 100kHz - 5.0MHz: -0.5dB - +0.5dB, 5.0MHz - 5.5MHz: -1.0dB - 0dB, roll off above 5.5MHz (PAL)
S/N Ratio	56dB (no quantization noise)
DG/DP	Within 1.5% / Within 1.5° (APL50%)
K-Factor (2T pulse)	Within 1%
H/V Tilt	Within 1%
Residual Jitter	Y: -15nsec - +15nsec, C: -2° - +2°
Process Control	◆ Video Level: -3dB - +3dB ◆ Chroma Level: -3dB - +3dB ◆ Setup Level: -15 IRE - +15 IRE ◆ Chroma Phase: -30° - +30°
Genlock Phase Control*	◆ H Phase: -2μsec - +2μsec
Temperature / Humidity	10°C - 40°C / 30% - 90% (no condensation)
Power / Consumption	Supply from UFM Frame, +12VDC - +24VDC / Approx. 12VA (12W)
Draw	+12VDC: Approx. 1.0A, +24VDC: Approx. 0.5A
Dimensions / Weight	106 (W) x 303 (D) mm (Front board), 106 (W) x 66.1 (D) mm (Rear board) / Approx. 0.5kg
Necessary Slot	1 slot
Accessories	Operation manual

*Analog Composite output is not synchronized with SC Phase.

Rear View

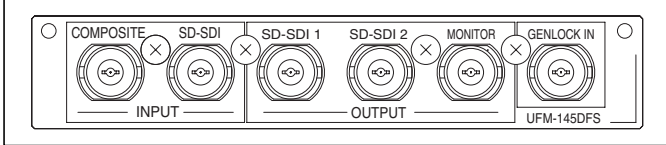

Audio Interface

UFM-100AED

The UFM-100AED, an audio interface for UFM-145DFS, provides audio embedding and de-embedding. Usable in discrete form as an A to D converter, D to A converter, sample rate converter and delay line.

- Support for UFM-145DFS Frame Synchronizer as an audio interface.
- Embedder and de-embedder.
- Accepts both AES/EBU analog and digital input audio, providing analog and digital output audio.
- Two stereo channels (4 monaural channels).
- Built-in variable range (4ms to 999ms) delay line.
- High-quality 24-bit quantizing, 48 kHz sampling frequency audio.
- Usable in discrete form as an A to D converter, D to A converter, sample rate converter (to 48 kHz) or delay line.

Universal Frame Line-up

UF-106



Universal frame that can install up to 6 UFM modules, provides redundancy and universality, and contributes to reduced system space

UF-112



Universal frame that can install up to 12 UFM modules, provides redundancy and universality, and supports remote monitoring with installation of control board

FOR-A COMPANY LIMITED

Head Office : 3-8-1 Ebisu, Shibuya-ku, Tokyo 150-0013, Japan

FOR-A UK Limited : UNIT C71., Barwell Business Park, Leatherhead Road, Chessington Surrey, KT9 2NY, U.K.

FOR-A Italia S.r.l. : Viale Europa 50 20093, Cologno Monzese (MI), Milan, ITALY

FOR-A America Corporate Office : 11125 Knott Ave., Suite #A, Cypress, CA 90630, U.S.A.

FOR-A America East Coast Office : 1065 Avenue of the Americas Suite #1701A New York, NY 10018, U.S.A.

FOR-A America Atlanta Office : 4219 Burns Heritage Trail, Roswell, GA, 30075, U.S.A.

FOR-A America Distribution & Service Center : 2400 N.E. Waldo Road, Gainesville, FL 32609, U.S.A.

FOR-A Corporation of Canada : 425 Queen St. W. #210, Toronto, Ontario M5V 2A5, CANADA

Homepage: <http://www.for-a.com>

+81 (0)3-3446-3936

+44 (0)20-8391-7979

+39 02-254-3635/6

+1 714-894-3311

+1 212-861-2758

+1 770-645-7776

+1 352-371-1505

+1 416-977-0343

Fax : +81 (0)3-3446-1470

Fax : +44 (0)20-8391-7978

Fax : +39 02-254-0477

Fax : +1 714-894-5399

Fax : +1 212-861-2793

Fax : +1 770-234-5165

Fax : +1 352-378-5320

Fax : +1 416-977-0657

