

## HVS-2240OU/3320OU/2120ROU Datasheet

### 1. Specifications

#### Basic specifications

|                                       |  |   |                     |
|---------------------------------------|--|---|---------------------|
| Temperature                           | 0°C to 40°C  |   |                     |
| Humidity                              | 30% to 90% (no condensation)   |   |                     |
| Power                                 | AC100V - 240V ±10% 50/60Hz   |   |                     |
| Consumption                           | [2240OU]   | 46 W (at 100-120 V)                     | 46 W (at 220-240 V) |
|                                       | [3320OU]   | 67 W (at 100-120 V)                     | 63 W (at 220-240 V) |
|                                       | [2120ROU]  | 46 W (at 100-120 V)                     | 46 W (at 220-240 V) |
| Dimensions                            | [2240OU]   | 1060 (W) x 354 (D) x 155 (H) mm         |                     |
|                                       | [3320OU]   | 1196 (W) x 494 (D) x 155 (H) mm         |                     |
|                                       | [2120ROU]  | 430 (W) x 420 (D) x 127 (H) mm          |                     |
| Weight                                | [2240OU]   | 12 kg                                   |                     |
|                                       | [3320OU]   | 22 kg (23 kg w/ redundant power supply) |                     |
|                                       | [2120ROU]  | 8 kg                                    |                     |
| Consumables<br>(at 24-hour operation) | Power supply unit: Replace every 5 years.<br>SBC battery: Replace every 3 years. |   |                     |

#### Technical specifications

|                       |                                   |  |                         |
|-----------------------|-----------------------------------|--|-------------------------|
| Supported switcher    | HVS-2000<br>HVS-6000/6000M        |  |                         |
| Number of lines       | [2240OU]                          | 2  |                         |
|                       | [3320OU]                          | 3  |                         |
|                       | [2120ROU]                         | 2  |                         |
| Number of bus buttons | [2240OU]                          | 24   |                         |
|                       | [3320OU]                          | 32   |                         |
|                       | [2120ROU]                         | 12   |                         |
| Interfaces            |                                   |  |                         |
| VGA                   | For PC monitor connection         |  |                         |
| HDMI                  | For touch panel connection        |  |                         |
| USB                   | [2240/3320OU]                     | Panel: 2.0 (Type-A) x 2                                    | Rear: 2.0 (Type-A) x 4  |
|                       | [2120ROU]                         | Panel: 2.0 (Type-A) x 2                                    | Rear: 3.0 (Type-A) x 2  |
| LAN 1 (MAIN)          | RJ-45 x 1 For HVS-2000 connection |  |                         |
| LAN 2 (SUB)           | [2240/3320OU]                     | RJ-45 x 1  | For HVS-2000 connection |
|                       | [2120ROU]                         | RJ-45 x 2  | For HVS-2000 connection |
| GPI IN/TALLY OUT      | [2240/3320OU]                     | 25-pin D-sub (female) x 1 (inch screws) 12-input/12-output |                         |
| GPI I/O               | [2120ROU]                         | 5-pin D-sub (female) x 1 (inch screws) 6-input/6-output    |                         |
| DC OUTPUT(5V)         | [2120ROU]                         | 4-pin XLR x 1 For LED lam (w/ power switch and controller) |                         |
| LAMP                  | [2120ROU]                         | USB 2.0 (Type-A) x 1 For LED lighting                      |                         |

#### HVS-2240OU / 3320OU Options

|             |   |
|-------------|---|
| HVS-2000PSO | Redundant power supply unit for HVS-2240/3320OU |
|-------------|---|


**HVS-2240OU/3320OU/2120ROU Accessories**

Bus button partition plate (2240OU/3320OU), User button cover plate (3320OU),  
Control cables, AC Cord or AC adapter


**2. External Dimensions**

(All dimensions in mm.)

**HVS-2240OU**

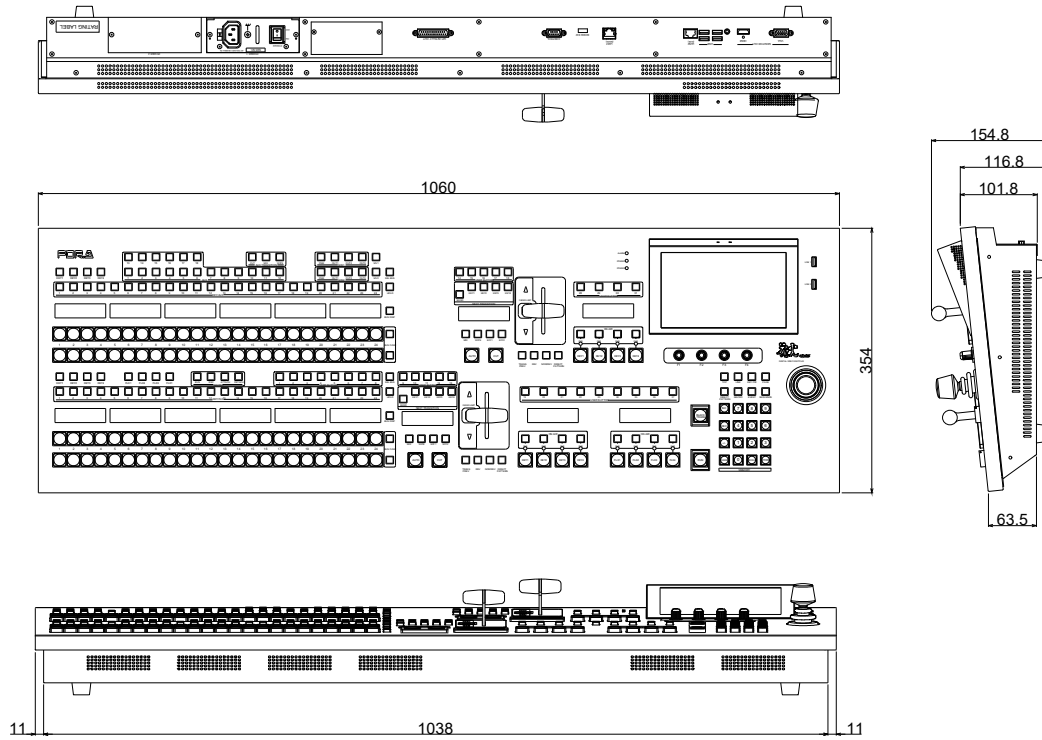

**HVS-3320OU**

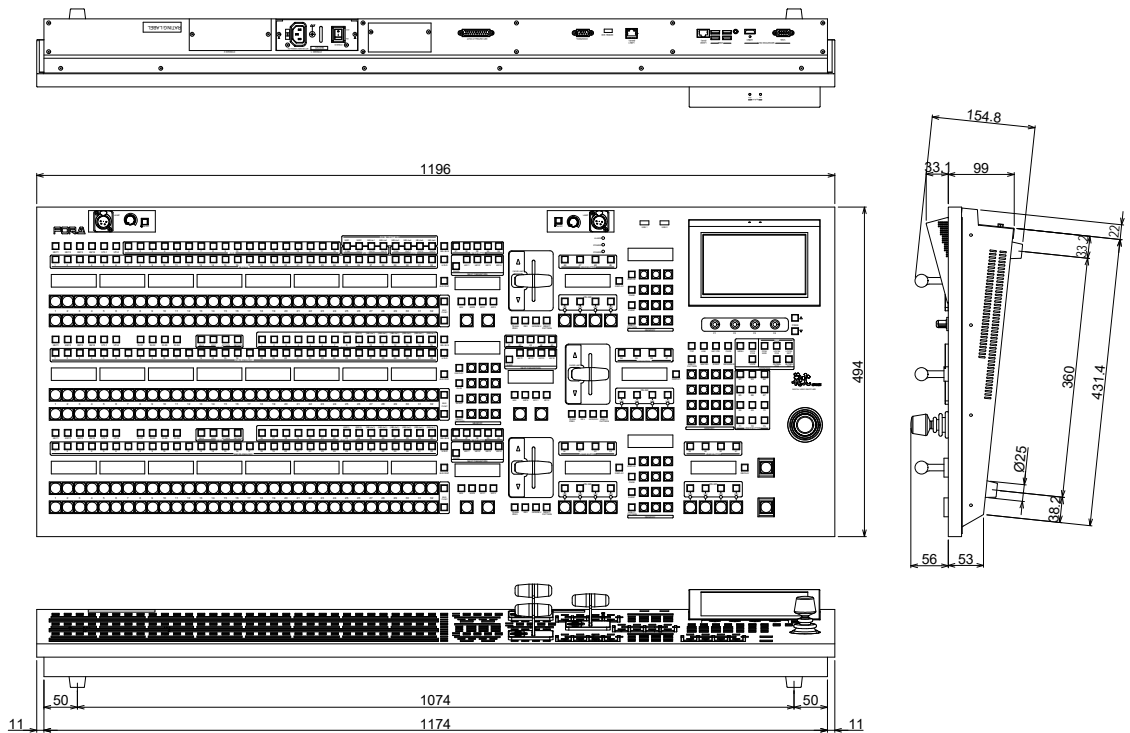

**HVS-2120ROU**

(All dimensions in mm.)

